

ATP

URBAN

FURNITURE

4

BOLLARD LIGHTS AND BOLLARDS

26

FENCES

32

BENCHES

36

RAILINGS

BOLLARD LIGHTS AND BOLLARDS

*Stylish design that is vandal-proof and
immune to corrosion*

*See all the available models and
their characteristics here:*



BOLLARD LIGHTS

Ideal for illuminated signs to indicate different areas in public spaces



Esférica



Dimensions

Width	275 mm
Height	350 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
ULOR	15 %
Light source	E-27

Anchoring system



Standard colours



Peón



Dimensions

Width	275 mm
Height	380 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
ULOR	15 %
Light source	E-27

Anchoring system



Standard colours



Alfil



Dimensions

Width	275 mm
Height	540 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
ULOR	15 %
Light source	E-27

Anchoring system



Standard colours



Centro



Dimensions	
Width	300 mm
Height	730 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
ULOR	15 %
Light source	E-27



Torre



Dimensions	
Width	300 mm
Height	1000 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
ULOR	15 %
Light source	E-27



Clásica 55



Dimensions	
Width	230 mm
Height	550 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
ULOR	15 %
Light source	E-27



Clásica 95



Dimensions	
Width	230 mm
Height	950 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
ULOR	15 %
Light source	E-27



Faro 65



Dimensions	
Width	290 mm
Height	650 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
ULOR	15 %
Light source	E-27



Faro 90



Dimensions	
Width	290 mm
Height	900 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
ULOR	15 %
Light source	E-27



Diábolo 75



Dimensions

Width	345 mm
Height	750 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
ULOR	15 %
Light source	E-27

Anchoring system



Standard colours



Diábolo 100




Dimensions

Width	345 mm
Height	1000 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
ULOR	15 %
Light source	E-27

Anchoring system



Standard colours



Delta



Dimensions

Width	345 mm
Height	980 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
ULOR	15 %
Light source	E-27

Anchoring system



Standard colours



Accesorios



Custom shield

ATP bollard lights can be customised with tailored heraldic shields or inscriptions. The customer can choose from among more than 100 models available or send us their own template.

Available for Centro, Clásica, Delta, Faro, and Torre models.



Dusk sensor

Accessory that responds to light intensity changes in the environment by turning on or turning off the luminaire.

Available in Clásica and Faro models.



Socket

Low voltage socket (250 V) integrated in the shaft. Electrical characteristics of the outlet: 2P + TTL, current 16 A, voltage 250 V, frequency 50/60 Hz.

Available in Clásica and Faro models.





BOLLARDS

Organise a space with the layout that best adapts to each area

Esférico



Dimensions

Diameter	275 mm
Height	350 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years

Anchoring system



Standard colours



Peón



Dimensions

Diameter	275 mm
Height	440 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years

Anchoring system



Standard colours



Alfil



Dimensiones

Diameter	275 mm
Height	540 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years

Anchoring system



Standard colours



Centro



Dimensions

Diameter	290 mm
Height	750 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years

Anchoring system



Standard colours



Torre



Dimensions

Diameter	290 mm
Height	1050 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years

Anchoring system



Standard colours



Atenea



Dimensions

Base diameter	150 mm
Height	800 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years

Anchoring system



Standard colours



Estriado 55



Dimensions

Base diameter	171 mm
Height	550 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years

Anchoring system



Standard colours



Estriado 80



Dimensions

Base diameter	171 mm
Height	800 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years

Anchoring system



Standard colours



Forte 52



Dimensions

Base diameter	171 mm
Height	520 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years

Anchoring system



Standard colours



Forte 68



Dimensions	
Base diameter	171 mm
Height	680 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years

Anchoring system



Standard colours

Forte E52



Dimensions	
Base diameter	171 mm
Height	525 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years

Anchoring system



Standard colours

Inox



Dimensions	
Base diameter	130 mm
Height	555 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years

Anchoring system



Standard colours



FOCUS BOLLARD LIGHT: INTEGRATED LED TECHNOLOGY

Discover our Focus
bollard here:



Focus 1



Dimensions

Width	120 mm
Height	240 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
Light source	GU-10

Anchoring system



Standard colours



Focus 2 | 60°



Dimensions

Width	120 mm
Height	320 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
Light source	GU-10

Anchoring system



Standard colours



Focus 2 | 180°



Dimensions

Width	120 mm
Height	320 mm

Especificaciones

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
Light source	GU-10

Anchoring system



Standard colours



Focus 2 | 360°



Dimensions

Width	120 mm
Height	320 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
Light source	GU-10

Anchoring system



Standard colours



Focus 3 | 60°



Dimensions

Width	120 mm
Height	400 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
Light source	GU-10

Anchoring system



Standard colours



Focus 3 | 180°



Dimensions

Width	120 mm
Height	400 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
Light source	GU-10

Anchoring system



Standard colours



Focus 3 | 360°



Dimensions

Width	120 mm
Height	400 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
Light source	GU-10

Anchoring system



Standard colours



Focus H



Dimensions

Width	150 mm
Height	120 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
Light source	GU-10

Anchoring system



Standard colours



Focus I | 60°



Dimensions

Width	120 mm
Height	800 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
Light source	GU-10

Anchoring system



Standard colours



Focus I | 180°



Dimensions

Width	120 mm
Height	800 mm


Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Voltage and frequency	230 V - 50 Hz
Light source	GU-10

Anchoring system



Standard colours

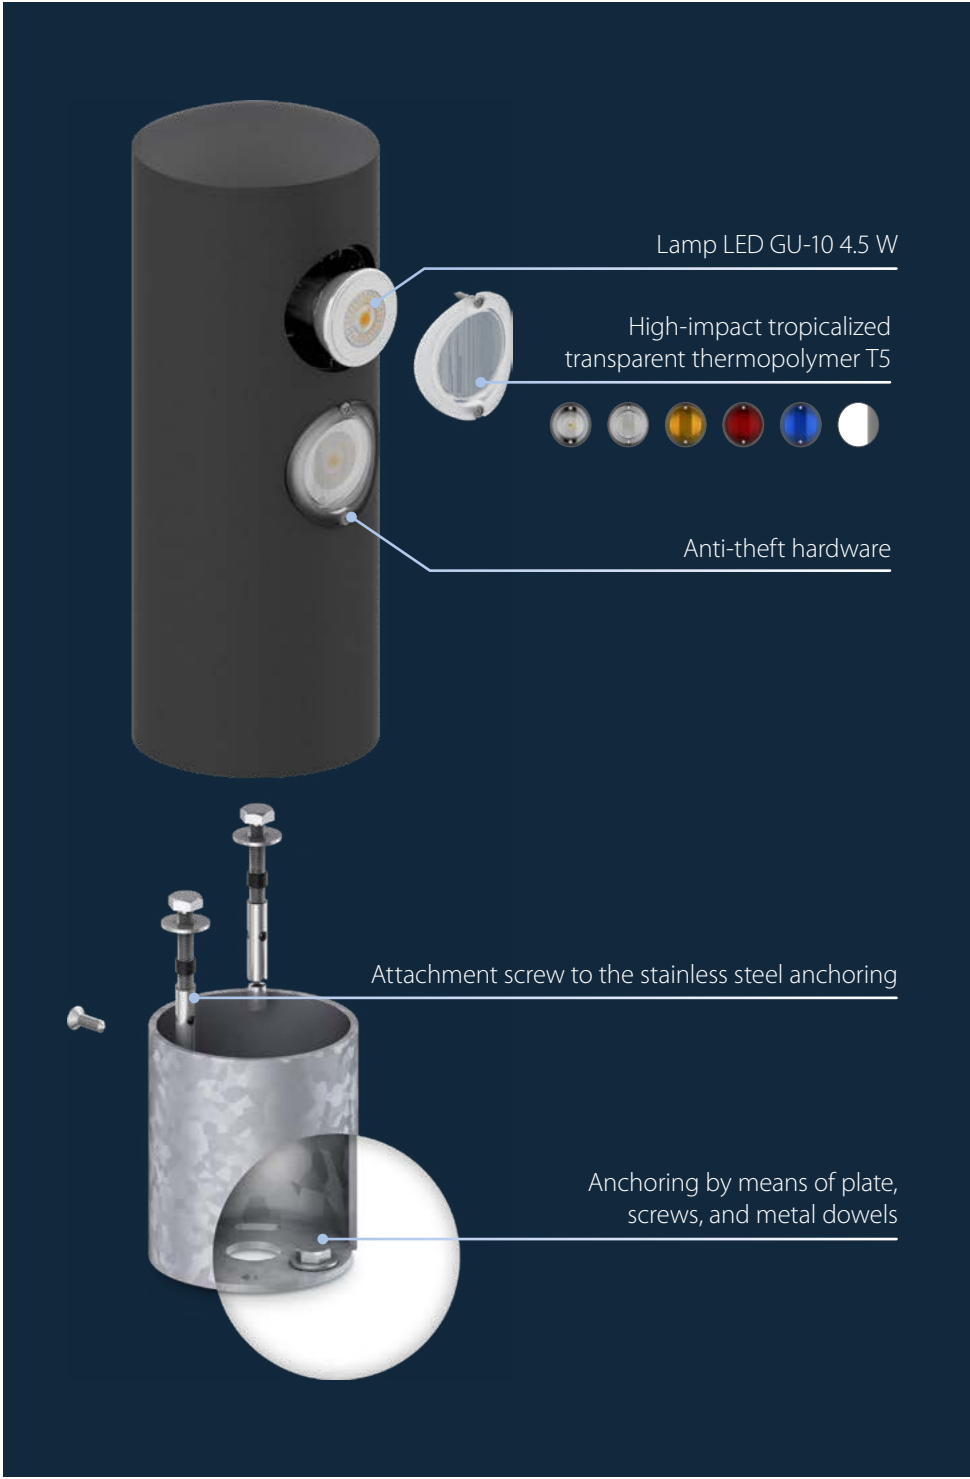

FENCES

*Manufactured with Synergy Tube®: functional,
vandal-proof and immune to corrosion*

*See all the models and their
characteristics here:*



DELIMIT THE SPACE SECURELY AND ELEGANTLY

Choose the finish that best suits the aesthetics of your project



Valla 1



Dimensions	
Height	1100 mm
Distance between tubes	93 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Synergy Tube®	Ø 50 mm

Standard colours

Valla 2



Dimensions	
Height	1100 mm
Distance between tubes	117 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Synergy Tube®	Ø 50 mm

Standard colours

Valla 3



Dimensions	
Height	1100 mm
Distance between tubes	125 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Synergy Tube®	Ø 75 mm

Standard colours

Valla 4



Dimensions	
Height	2400 mm
Distance between tubes	125mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Synergy Tube®	Ø 75 mm

Standard colours

Valla 5



Dimensions	
Height	2400 mm
Distance between tubes	130 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Synergy Tube®	Ø 120 mm

Standard colours







BENCHES

*Manufactured with our engineered
technical polymers and available with an
LED spotlight*

*See all the available models and
their characteristics here:*

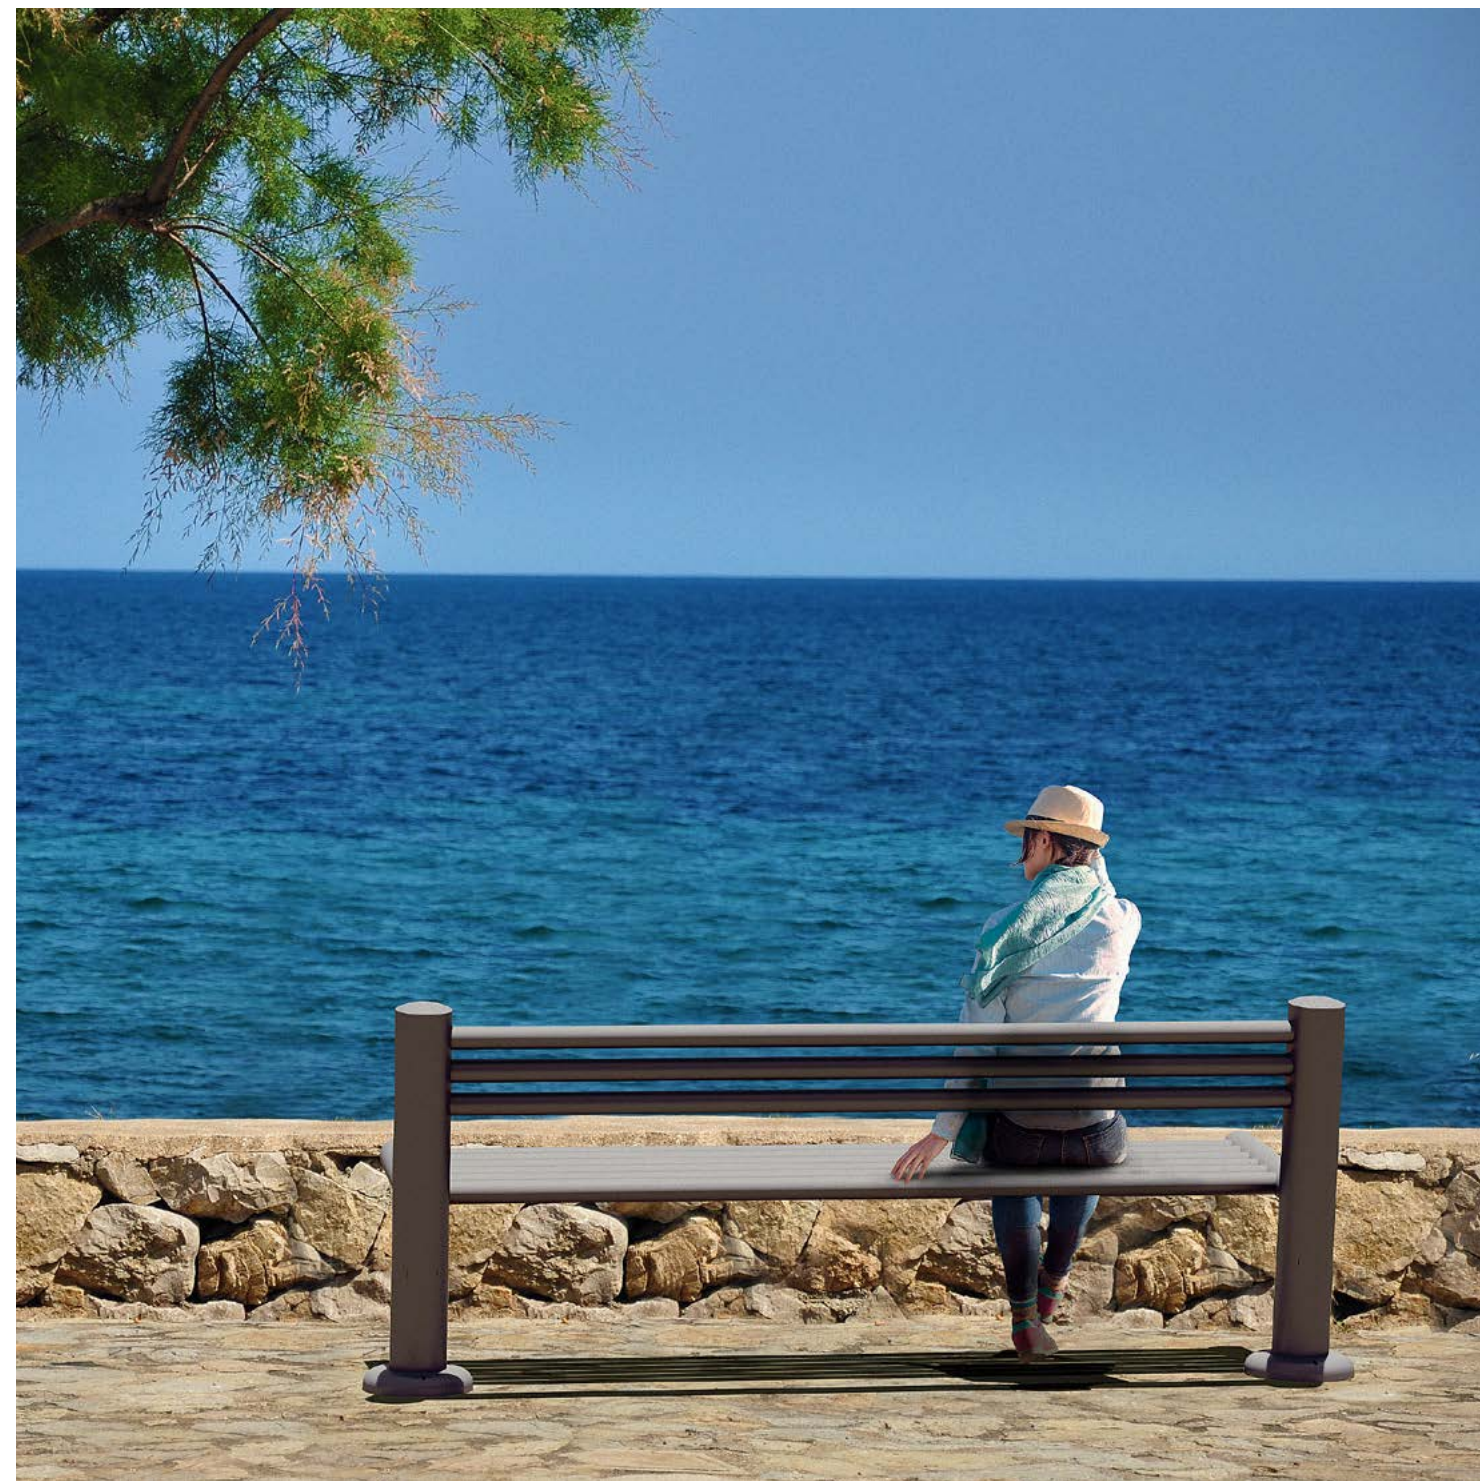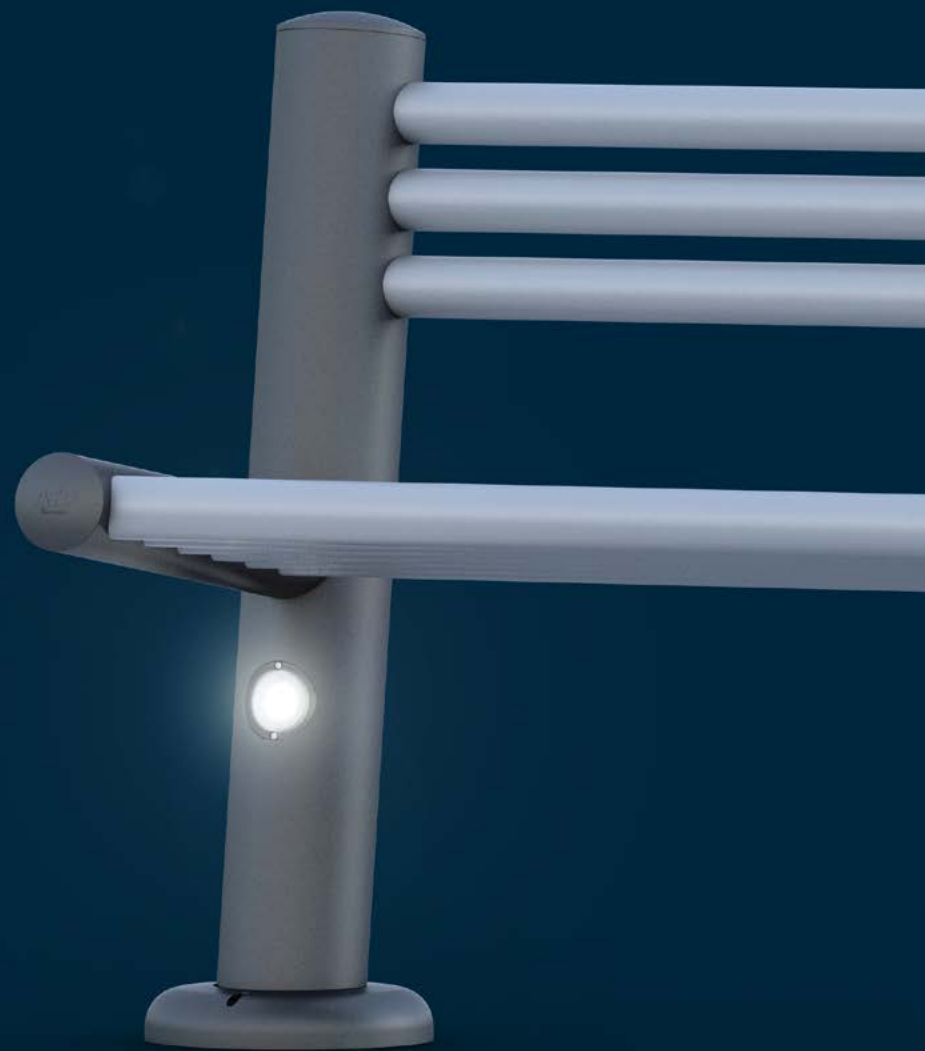

COMFORTABLE AND BUILT TO LAST

*Various configurations that are resistant to vandalism,
corrosion and weather degradation*



Banco 1



Dimensions

Width	2000 mm
Height	818 mm
Depth	583 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Synergy Tube®	Ø 50 y Ø 120 mm
LED lighting	Optional

Anchoring system



Standard colours



Banco 2



Dimensions

Width	2000 mm
Height	830 mm
Depth	994 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Synergy Tube®	Ø 50 y Ø 120 mm
LED lighting	Optional


Anchoring system



Standard colours



Banco 3

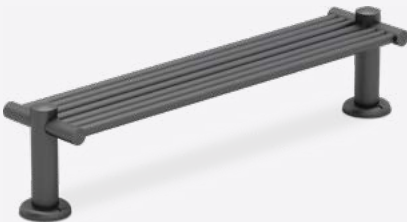

Dimensions

Width	2000 mm
Height	590 mm
Depth	490 mm

Specifications

IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Synergy Tube®	Ø 50 y Ø 120 mm
LED lighting	Optional

Anchoring system




Standard colours



RAILINGS

Sturdy and durable, with four configurations that allow for three to six crossbeams

See all the available models and their characteristics here:

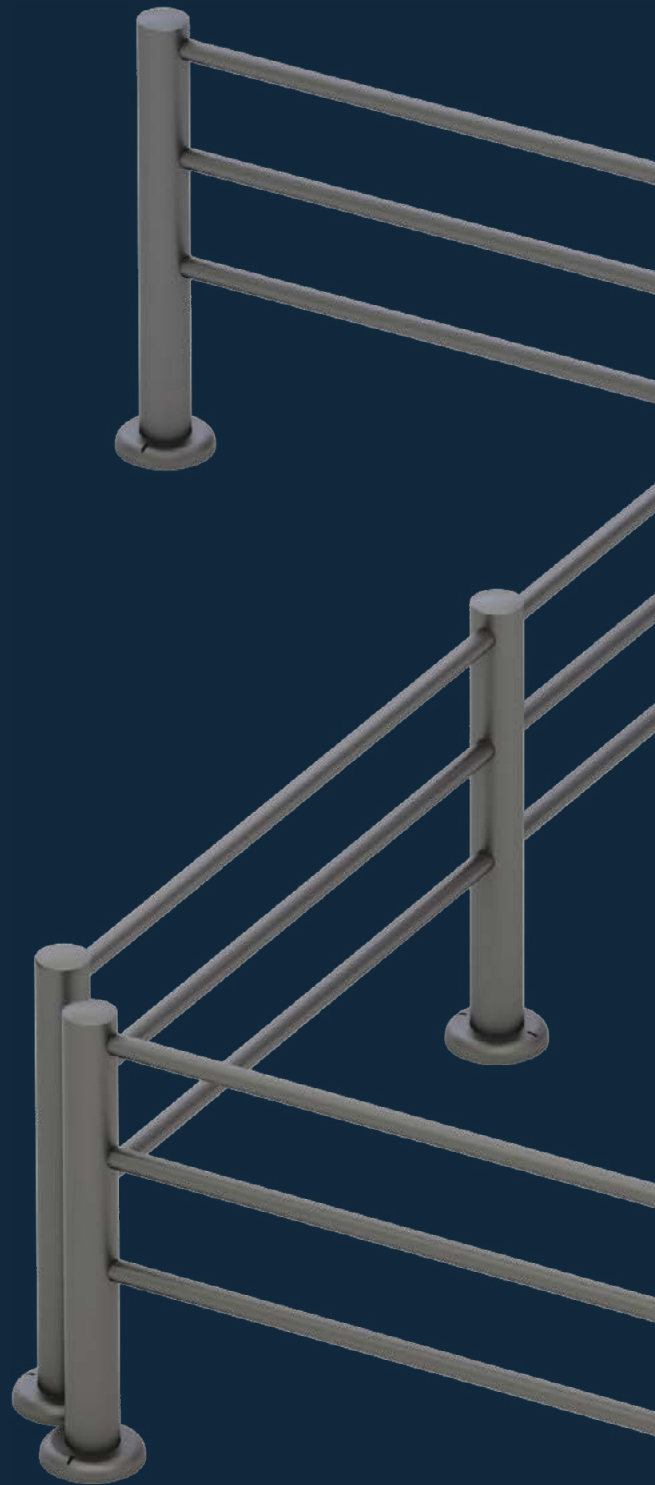

Barandilla 3



Dimensions	
Width	2000 mm
Height	1100 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Synergy Tube®	Ø 50 y Ø 120 mm
LED lighting	Optional

Anchoring system



Standard colours

Barandilla 4



Dimensions	
Width	2000 mm
Height	1100 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Synergy Tube®	Ø 50 y Ø 120 mm
LED lighting	Optional

Anchoring system



Standard colours

Barandilla 5



Dimensions	
Width	2000 mm
Height	1100 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Synergy Tube®	Ø 50 y Ø 120 mm
LED lighting	Optional

Anchoring system



Standard colours

Barandilla 6




Dimensions	
Width	2000 mm
Height	1100 mm

Specifications	
IK degree of protection	IK10
IP degree of protection	IP66
Immune to corrosion	Yes
Insulation class	Class II
Comprehensive warranty	10 years
Synergy Tube®	Ø 50 y Ø 120 mm
LED lighting	Optional

Anchoring system



Standard colours

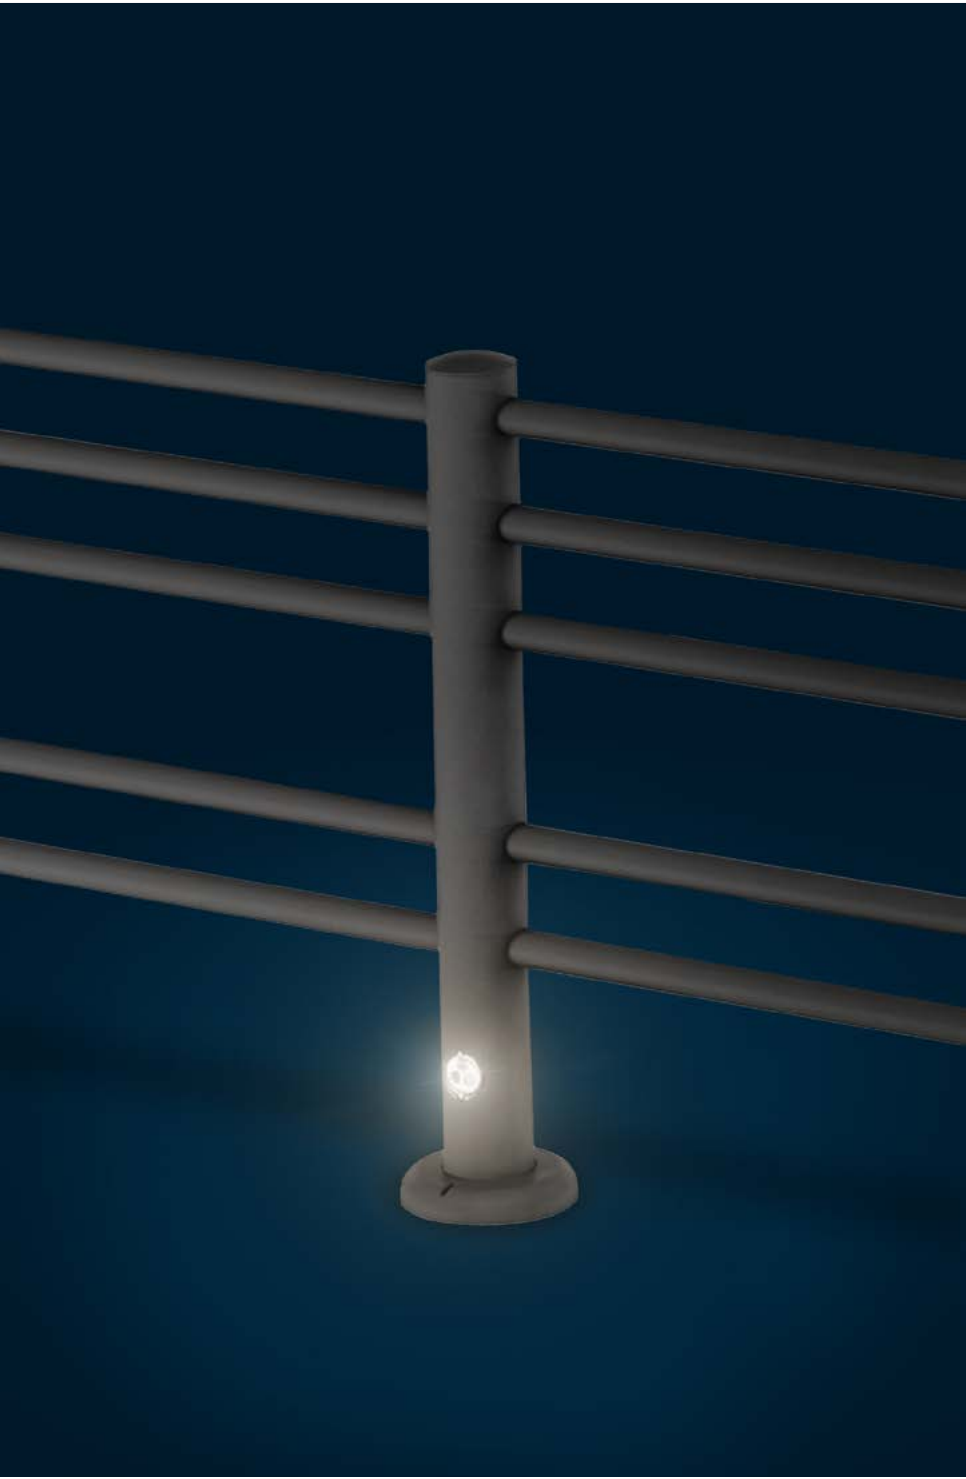

BRINGING YOU
ATP'S UNIQUE FEATURES
AND A 10-YEAR WARRANTY
AT ALL TIMES



POLYMERIC
MATERIALS

Manufactured with state-of-the-art polymeric materials created exclusively by ATP to offer maximum resistance to external factors and vandalism.



IK10+: MORE THAN
VANDAL-PROOF

Our products pass impact tests in excess of 50 joules, more than double the IEC 62262 standard for the highest IK category (IK10, 20 joules).



IMPOSSIBILITY OF
ELECTROCUTION

Totally safe products manufactured with insulating materials that eliminate the danger of electrocution when coming into contact with the light fixture or pole.



100 %
RECYCLABLE

The most environmentally friendly street furniture in the world: made from 100% recyclable materials with sustainable transformation processes at a minimum economic cost.



IMMUNE TO
CORROSION

Our street furniture is made from raw materials that are unaffected by corrosion and completely rustproof in any environment.




IP66+: TOTALLY
HERMETIC

Thanks to our continuous sealing gasket, the light fixtures integrated in our illuminated bollards and benches offer complete protection against the penetration of liquids and solid particles.



ATP SYNERGY
TUBE®

Hybrid steel and engineered technical polymer tubing structure providing extraordinary strength, unrivalled resistance to oxidation and total protection against electrical current.

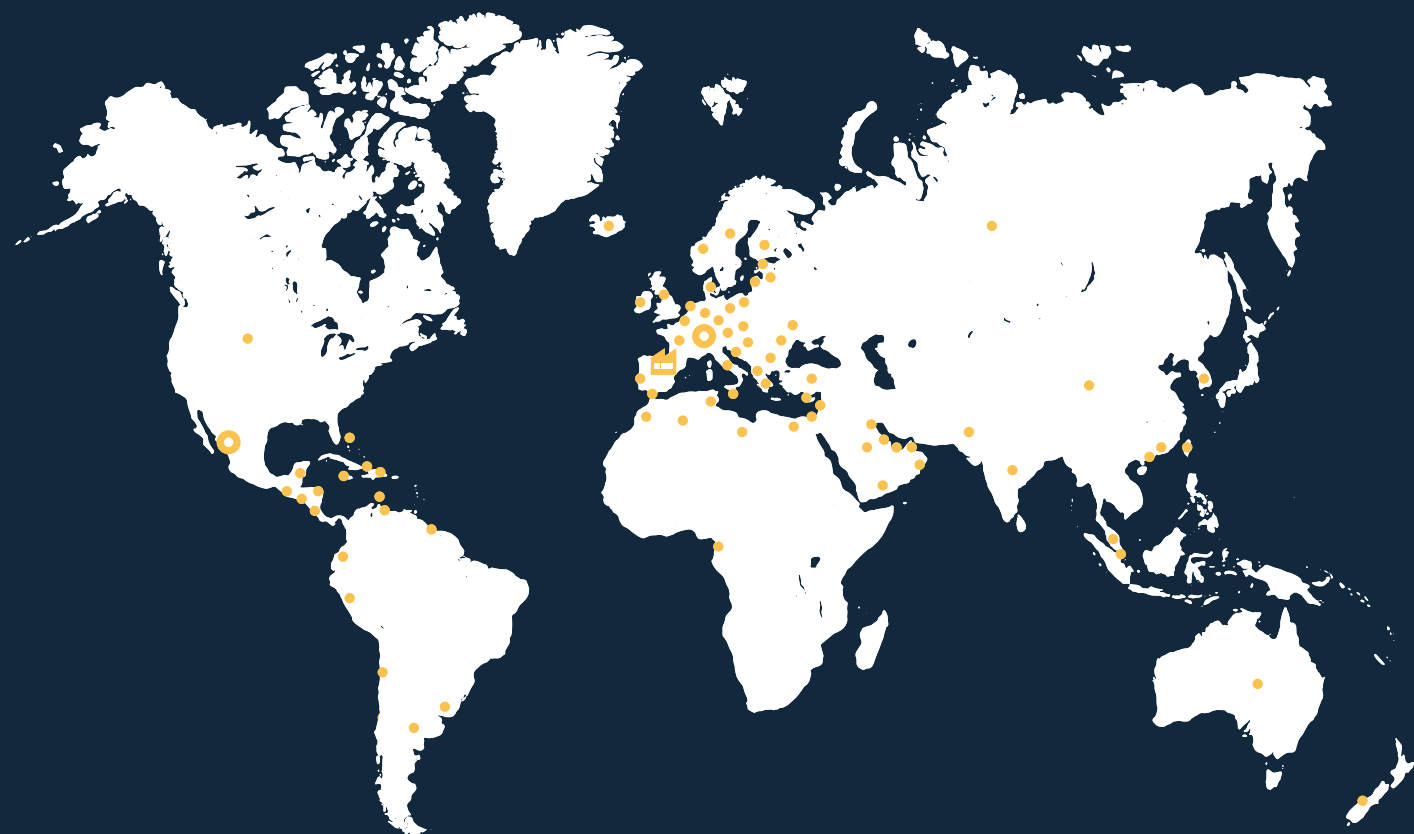

 Factory  Branches  Exports

ATP Factory

Avda. Irún,33
31194 · Arre
Navarra · Spain
Tel. (+34) 948 330 712
info@atpiluminacion.com

ATP America

Av. Hércules 301-B
interiores 6 y 7
Polígono empresarial Santa Rosa
76220 · Santa Rosa Jáuregui
Querétaro, Mexico
Tel. (+52) 01 442 291 1501
mexico@atplighting.com

ATP Europe

Chlupfgasse 2
8303 · Bassersdorf
Zurich, Switzerland
Tel. (+41) (0) 43 497 99 74
info@atplighting.com

Consult the updated list of our branches in Spain and our international network of authorised agents here:





Discover all our products
on our website



Alumbrado Técnico Público S.A.
Avda. Irún, 33 - 31194 Arre (Navarra), Spain.
Tel. (+34) 948 330 712 | info@atpiluminacion.com
ATPlighting.com