

Ronda A

ATP lighting
10 YEAR WARRANTY
IMMUNE TO CORROSION
STREET LIGHTING

 **Standard colours**
Other colours available on demand.



N Black



GC Light grey



GO Dark grey



V Green

Technical specifications

Coupling

Ø 75 mm.

Adaptor

Ø 50, 60 mm.

LED voltage

220-240V 50-60Hz

Electronic discharge voltage

208-277V 50-60Hz

Electromagnetic discharge voltage

230V 50Hz / 220V, 240V 60Hz

Recommended maximum height

8 m.

Weight without gear

5,7 Kg.

Photocell

On request.

Protection grades



Exclusive technology




Electrical insulation



Warranty



Dimensions

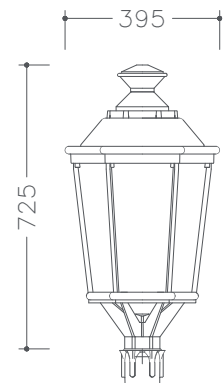

Certificates



NOM



CE



CB Certificate



ENEC



ISSOP



UKCA

Available optics



53 W Max.



53 W Max.



53 W Max.



53 W Max.



53 W Max.



55W Máx.

Colour temperatures



PC AMBER



1800 K



2200 K



2700 K



3000 K



4000 K

 Designed and manufactured integrally by ATP in Europe

ATP LIGHTING INTERNATIONAL, S.A.
Chlupfgasse 2 · 8303 Bassersdorf · Switzerland
info@atplighting.com · www.atplighting.com